


IntiTOP

This luminaire is primarily designed for accent and functional lighting in entrance areas. It is suitable for built-in installation and can be mounted using either springs or screws, offering flexible and secure placement options.





Application

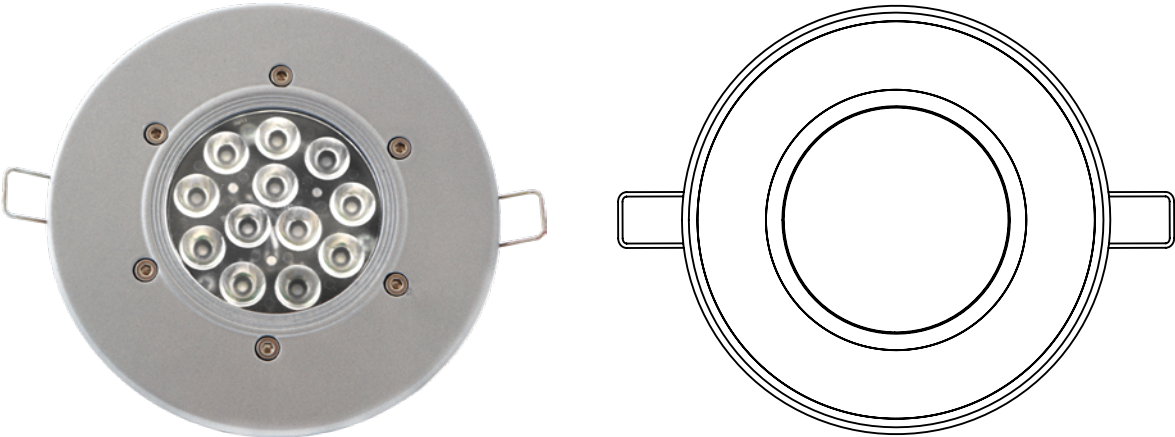

accent

IntiTOP



CRI
≥80 (for white color)

Color binning
2 MacAdam ellipses for white,
±3 nm for color LED

Voltage
24 V DC

IP66 IK09


Lifespan
not less than 50 000 hours

- 40°C + 55°C

Controls, protocols
monochrome: On/Off, PWM
multichannel: DMX-512

Controls, pixel size
1 luminaire – 1 pixel

Materials
housing – extruded aluminum section
with galvanic coating (anodic oxidation), covered
with powder paint
protective glass – shock-resistant polycarbonate/silicate
tempered glass
metalware – stainless steel





Standard coating type
moire

Customization
for monochrome DMX-512
connectors IP68
cable length up to 5m
light color, wattage and luminous flux
can be customized for a specific project

Available custom versions

Technologies



weight, kg
0,7

IntiTOP

monochrome

1. Select a model

Serial code	W, max	lm, max	Weight, kg
IRB12-1	13	1050	0,7

2. Create an article number

Serial code	Color	Optics	Controls*	Supply voltage**
IRB12-1	W30 W40 W50	15 34 45 80 40x20	D	L24

* D – protocol PWM
**L24 – supply voltage 24 V DC

multichannel

1. Select a model

Serial code	W, max	lm, max	Weight, kg
IRB12-1	15	620	0,9

2. Create an article number

Serial code	Color	Optics	Controls*	Supply voltage**
IRB12-1	RGB	15 34 45 80 40x20	C	L24

* C – protocol DMX-512
**L24 – supply voltage 24 V DC