

LINE antiglare

ILF21-1,5W(X)-50H-90

LINE antiglare — a stylish solution for comfortable lighting of the entrance group. The optical system with an additional anti-glare reflector reduces the level of visual discomfort and ensures a glare rating of $UGR < 19$. The variety of custom brackets allows for easy recessed or suspended installation of the fixture into the rack ceilings.

Light color	white 2700 K, 3000 K, 4000 K, 5000 K
CRI	≥ 85
Delivered lumens	up to 3850 lm*
Optics	50°
Voltage	230 V AC, (50±1) Hz
Wattage	up to 35 W*
Control	on/off
Cos φ	$> 0,9$
Electrical class	I
Operating temperature	from -40°C to +55°C
Lifespan	not less than 50 000 hours
Warranty	5 years
Weight	up to 2,5 kg*
Lengths	300, 600, 900 mm
Dimensions	58x56 mm
Mounting	built-in to the ceiling

Materials

housing: aluminum alloy covered with powder paint;
silicate tempered glass;
bracket: aluminum alloy/stainless steel covered with powder paint
mounts: aluminum alloy and stainless steel;

Customization

Customization of length, light color, optics, control (DALI), power and lumen output for the requirements of the project

**for the 900 mm length fixture*

Technologies

EternalTechnology® - continuous internal temperature monitoring technology of the lighting fixture

Truelight® - a comprehensive system of solutions and approaches that enables flawless lighting effects regardless of the light color, optic type, or fixture design.


Aquatech® - multi-stage water protection technology used in all INTILED fixtures with IP66 to IP68 ratings.

COOLight® - a comprehensive thermal management solution for INTILED lighting fixtures.




IP66 IK08


Dimension drawing

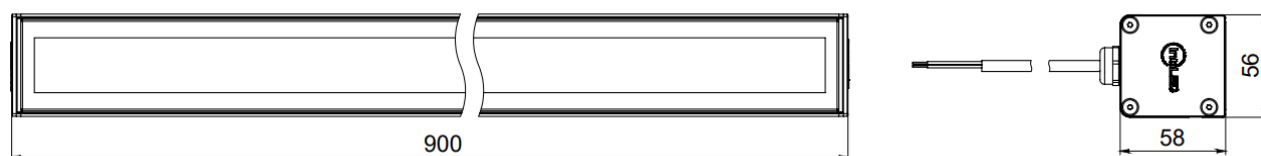

LINE antiglare mounting

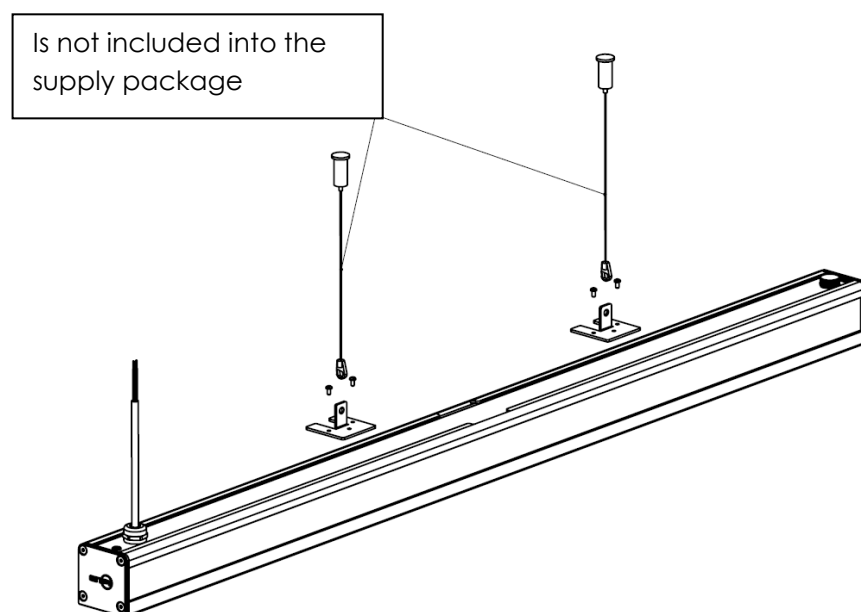

LINE antiglare mounting accessory: wire suspension

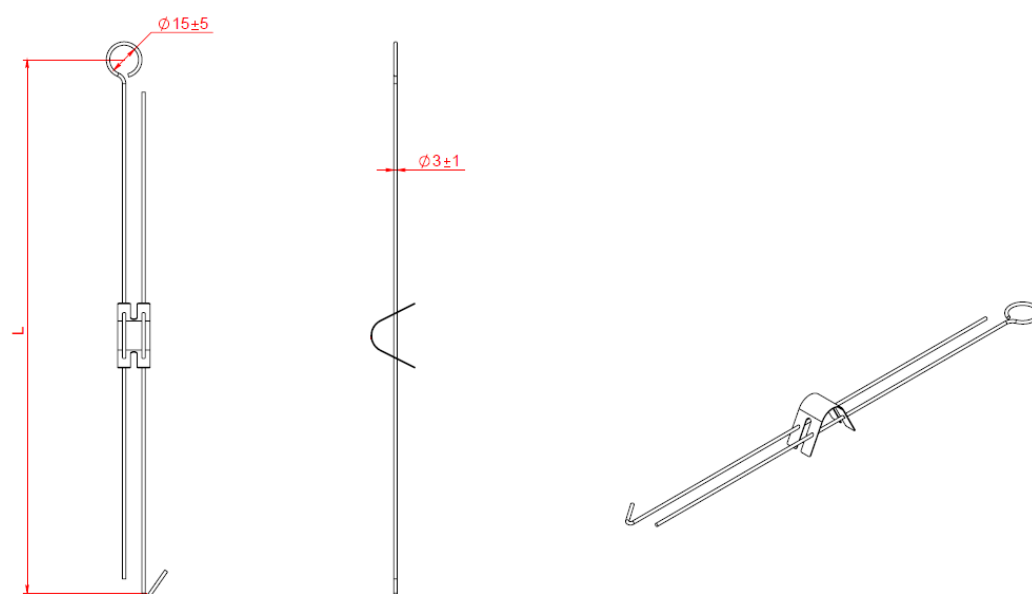

LINE antiglare mounting accessory: wire suspension with a hook

