



WALL

A timeless recessed luminaire designed with an expanded reflective surface to provide soft, even illumination. The front panel seamlessly conceals all fastening elements, ensuring a clean and minimalist appearance. Its versatile design makes it suitable for installation in small architectural features, retaining walls, building façades, or custom-designed bollards for landscape lighting applications.

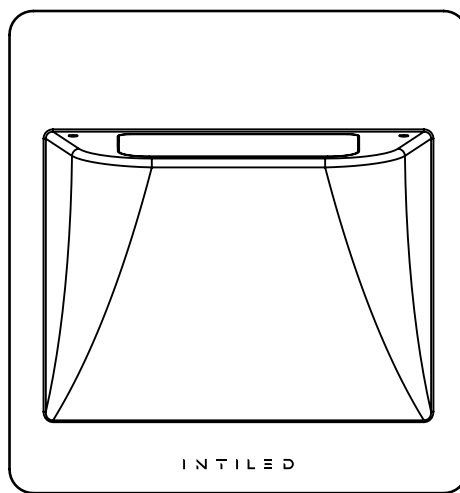

Application



landscape

WALL



2700 K



3000 K



4000 K



5000 K



Red



Green



Blue



Amber



50x100°

CRI

≥80 (for white color)

Color Binning

2 MacAdam ellipses for white,
±3 nm for color LED

Power factor

>0,9

Voltage


230 V AC

IP66 IK09



Lifespan

not less than 50 000 hours



- 40°C + 55°C

Controls, protocols

On/Off

Materials

housing – aluminum casting alloy, covered
with powder paint

protective glass – shock-resistant polycarbonate

mounting box – zink-plated steel

metalware – stainless steel

Standard RAL colors



1015



1001



8004



8017



9005



7016



9006



9003

Standard coating type

moire

Accessories

surface-mounted box

bollard

Customization

controls DALI, PWM, DMX-512, DMX-512 + RDM

connectors IP68

cable length up to 5m



voltage 12, 24, 48 V DC

customized product length, light distribution curve, light

wattage and luminous flux color for a specific project

premium bronze reflective paint finish

Available custom versions



weight, kg
1

1. Select a model

Serial code W, max lm, max

IRF1-3 13 360

2. Create an article number

Serial code	Color	Optics	Supply voltage*
IRF1-3	W27 W30 W40 W50 R G B A	15 30 60 125	L24

*L24 – supply voltage 24 V DC